

# COAXIAL CABLES FOR LED APPLICATIONS INSULATED IN FEP + SCREENING + FEP

**TB2--**

2010

**Type of insulation:** **FEP + SCREENING + FEP  
(COAXIAL)**

**Working temperature:** **T 180°C** for the sheath  
**T 180°C** for the inner core

**Type of conductor:** **TIN-PLATED COPPER** (for the internal core)  
**TIN-PLATED COPPER** (for the screening)

**Working voltage:** **60 V**  
**In conformity to the requirements of the directive:** **2014/35/EU**


**Approval marks:**



- *Sheath in bright FEP.*

- Tabella delle sezioni e dei multipli dei conduttori:

| Code         | Section mm <sup>2</sup> | Conductor internal strand | Screening external strand | Dimension d | Dimension ±0,2 mm D |
|--------------|-------------------------|---------------------------|---------------------------|-------------|---------------------|
| <b>TB20-</b> | 2 x 0,50                | 19 x 0,18                 | 16 x 4 x 0,10             | 1,4         | 2,3                 |
| <b>TB27-</b> | 2 x 0,75                | 19 x 0,23                 | 16 x 6 x 0,10             | 1,6         | 2,5                 |

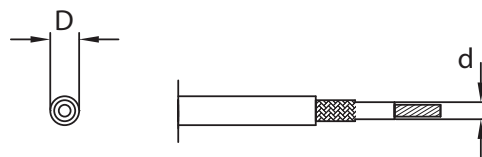

- Table of available colors:  
**T** = transparent  
**N** = black  
**B** = white  
- Other colours on request.

