



760

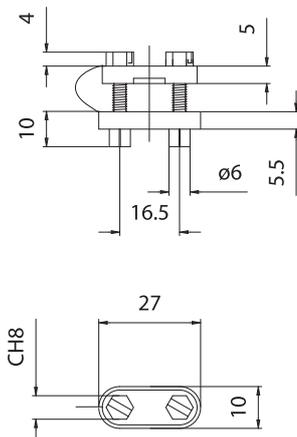

760: Cable clamp in natural PA66 T-20 +T125°C suitable to clamp cables with diameter between 3 and 10 mm.

- Fixing tightening the two plastic screws positioning the device on structures, thickness 0,8 - 2,5 mm, pre-arranged with holes diameter 6 mm with center distance 16,5 mm.

432

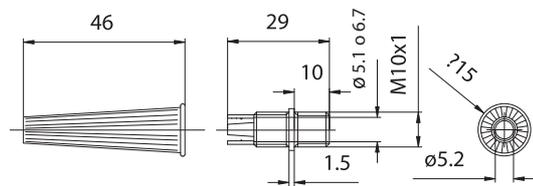

- **Cable clamp** in plastic material with male thread M10 x1.


432GH-: ring part of the cable clamp.

430--: part of cable clamp body with hole diameter 5,1 mm. Suitable to clamp cables with diameter between 4,3 and 5,0 mm.

430/5-: part of cable clamp body with hole diameter 6,7 mm. Suitable to clamp cables with diameter between 4,8 and 6,5 mm.

- Available colours:
T = transparent, in polycarbonate
B = white, in PA66
N = black, in PA66

430

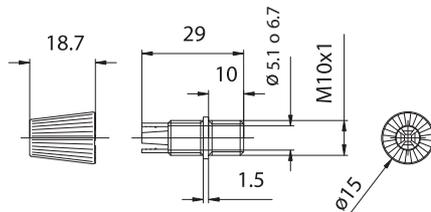

- **Cable clamp** in plastic material with male thread M10 x1.


430GH-: ring part of the cable clamp.

430--: part of cable clamp body with hole diameter 5,1 mm. Suitable to clamp cables with diameter between 4,3 and 5,0 mm.

430/5-: part of cable clamp body with hole diameter 6,7 mm. Suitable to clamp cables with diameter between 4,8 and 6,5 mm.

- Available colours:
T = transparent, in polycarbonate
B = white, in PA66
N = black, in PA66

1063



- **1063-**: **"O" rings** in transparent silicone. Normally used to hold the power cables close to the suspension device.

Article	D	d
1063	4,48 mm	1,78 mm
1063/2	1,8 mm	1,78 mm
1063/3	2,9 mm	1,78 mm
1063/4	3,7 mm	1,78 mm
1063/5	5,3 mm	1,78 mm
1063/6	6,7 mm	1,78 mm
1063/7	7,7 mm	1,78 mm
1063/8	8,8 mm	1,78 mm

- Other dimensions on request.