

A42

2004

CE**Lampholder:****GX10**

Rated voltage:

500 V

Impulse voltage:

5 kV

Rated current:

2 A

Working temperature:

T 260°C

Type of clamps to connect the cables:

SPRING CLAMPS (push-in insertion)

Clamps connecting capacity:

0,75 - 1,00 mm

Overtoltage category:

III

Protection degree (IP):

IP20

In conformity to the standards:

EN 60838-1

In conformity to the requirements of the directive:


2014/35/EU

Approval marks:

**Double insulation**

Single-conductor flexible connecting cables which could be connected to the lampholder (arranged with crimped end-terminals):

Insulation	T in °C	Conduct.	Available sections and tensions			
			Pulse KV	0,75 mm ²	1,00 mm ²	1,50 mm ²
Silicone+Silicone <i>Single insulation</i>	180	CuSn	5kV	•	•	
Oversize silicone <i>Single insulation</i>	180	CuSn	5kV	•	•	
Oversize PTFE <i>Single insulation</i>	250	CuNi	5kV		•	
Oversize PTFE+PFA <i>Double insulation</i>	250	CuNi	5kV		•	

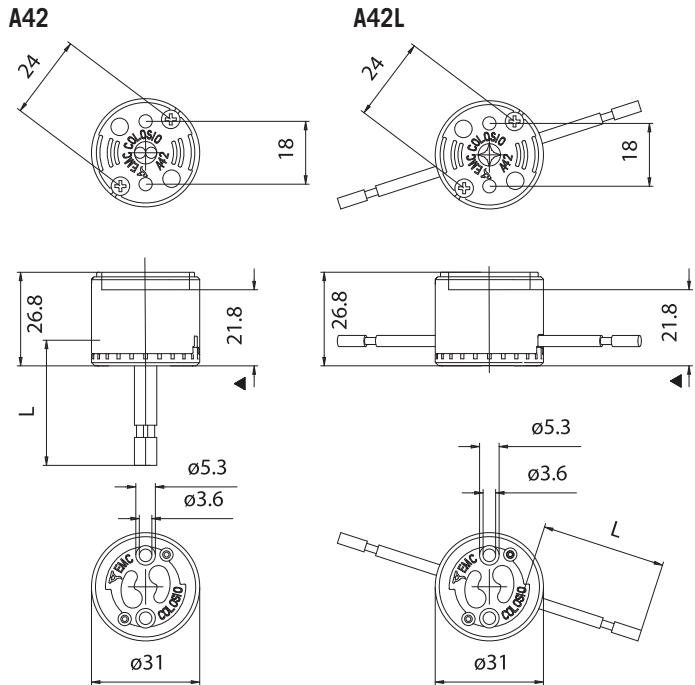

▲ Reference plane

LAMPHOLDERS FOR DISCHARGE LAMPS

Lampholder whose creepage and clearance distances allow the use in class II fixtures with pulse peak voltage up to 4,5kV, - or with working voltage up to 500V in applications foreseen for the overvoltage category II, - or with working voltage up to 250V in applications foreseen for the overvoltage category III, if connected with double or triple insulated cables (ref. standard EN 60598.1).

NOTE: back cable-clamp cover to be assembled after having inserted the cables in double insulation, which can exit from the back side or lateral side of the lampholder (ref. standard EN 60598.1 par. 5.2.10.3 "pull test 60 N" and "torsion test 0,15 Nm").

In some applications, it is necessary to guarantee the fastening of the cable-clamps cover by two 3 x 9,5 thread-forming screws for plastic, to be inserted in the holes with center distance 24 mm (ref. art. 652).


Attention: consider 2 cm of cables loss in lampholder with cables exit from the backside; consider 3 cm of cables loss in lampholder with cables exit from the lateral side.

Note: on request, it is also possible to supply the lampholder with already inserted cables (ref. A42 with back side exit, ref. A42L with lateral side exit).

- Steatite body.
- External envelope in black LCP (grey on request).
- Contacts in special silver-plated alloy.
- Push-in clamps built in the contacts.
- Cables exit from the back side or lateral side.

Built in cable-clamp device.

- Glow wire 960° C
- Weight: 23 g
- Instructions to fix the lampholder on structures.



• Suggested minimum dimension for cables passage (if necessary)

- Fixing of the lampholder:
 - by two M3 screws, with maximum head diameter 5,0 mm, 16 mm length + thickness of the material, to be inserted in the holes with center distance 18 mm (available screws M3 x20 art. 651).
 - by two thread-forming screws for plastic diameter 3 mm, 10 mm length + thickness of the material, to be inserted in the holes with center distance 24 mm. positioned in the back side of the lampholder (available thread-forming screws for plastic 3 x12 mm, ref. art. 526).



A42



Lampholder:

GX10

Rated voltage: **500 V**
Rated current: **2 A**
Impulse voltage: **5 kV**
Working temperature: **T 240°C**

Type of clamps to connect the cables:

SPRING CLAMPS
(push-in insertion)

Clamps connecting capacity: **18 AWG**
In conformity to the standards: **UL 496**
CSA 22.2 N.43

Approval marks:

cURus

Single-conductor flexible connecting cables which could be connected to the lampholder (arranged with crimped end-terminals):

Insulation	T in °C	Conduct.	Available voltages and AWG	
			600V	18AWG
Silicone Single insulation	200	CuSn	•	•
Silicone+glass-braid Single insulation	200	CuSn	•	•
PTFE Single insulation	250	CuNi	•	•
PTFE+PFA Double insulation	250	CuNi	•	•