

COAXIAL CABLES FOR LED APPLICATIONS

INSULATED IN FEP + SCREENING + PVC

(EXTRAFLEXIBLE)

BL2--

2013



Type of insulation:

FEP + SCREENING + PVC
(COAXIAL - EXTRAFLEXIBLE)

Working temperature:

T 70°C for the sheath
T 150°C for the inner core

Type of conductor:

RED COPPER (for the internal core)
RED COPPER (for the screening)

Working voltage:

60 V

In conformity to the requirements of the directive:

2014/35/EU


Approval marks:



- *Sheath in demi-bright PVC.*

- Sections and multiple table of the cores:

Code	Section mm²	Conductor internal strand	Screening external strand	Dimension d	Dimension ±0,2 mm D
BL20-	1 x0,50 + 1 x0,43	130 x 0,07	16 x 7 x 0,07	1,35	2,8
BL27-	1 x0,75 + 1 x0,74	196 x 0,07	16 x 12 x 0,07	1,65	3,1

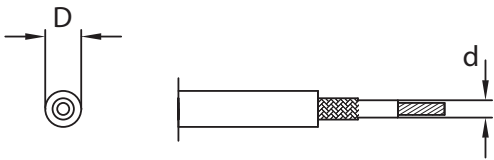

- Table of available colors:
- N = black
- B = white
- Other colours on request.

