

MULTI-CONDUCTOR CABLES INSULATED IN FEP/FEP, DOUBLE INSULATION, T180°C + PVC T90°C

BU---

1997

CE

Type of insulation: FEP / FEP + PVC

Working temperature: **T 90°C** for the sheath
T 180°C for the cores

Type of conductor: **TIN-PLATED COPPER**
Working voltage: **300/500 V**

In conformity to the requirements of the directives: **2014/35/EU**

Approval marks, of the cores in double insulation: **VDE REG. Nr.**



- Sections and multiple table of the cores:


Code	Sections mm ²	Conductor strand	Cores colours*	Cores position	Shape	Dimension ±0,2 mm
BU27T	2 x 0,75	19 x 0,23	t t	P	round	∅ 5,5
BUP7T	2 x 0,75	19 x 0,23	t t	P	flat	3,5 x 5,5

- Other sections and multiple on request.

* Colours table of the cores:
t = transparent

Note: for the cables with coloured sheath, the polarization of the cores is given with two different colours (blue and brown).

* Cores position table:
P = parallel

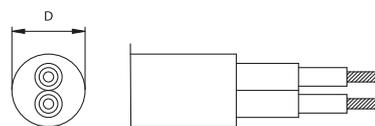

- VDE REG. Nr. approval printing on the cores in double insulation.

- Table of available colours:
T = transparent
N = black
- Other colours on request.