

SINGLE-CONDUCTOR CABLES INSULATED IN PTFE

T180°C

E0---



Type of insulation: PTFE

Working temperature: T 180°C


Type of conductor: TIN-PLATED COPPER

Working voltage: 300/500 V

In conformity to the standards: DIN VDE 0250

In conformity to the requirements of the directives: 2014/35/EU


Approval marks: VDE REG. Nr.

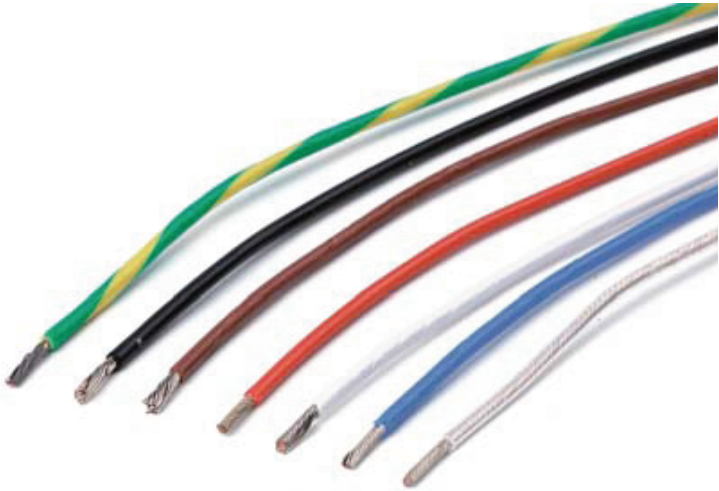

• Sections table of the flexible conductor:

Code	Sections mm ²	Conductor strand	External diameter ±0,2 mm
E017-	0,75 mm ²	19 x 0,23	1,6
E011-	1,00 mm ²	32 x 0,20	1,8
E015-	1,50 mm ²	19 x 0,32	2,2

• Other sections on request.

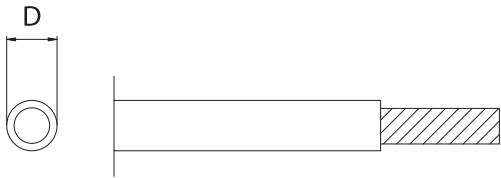

- Table of available colours:
- T = transparent
- B = white
- L = blue
- M = brown
- N = black
- G = yellow/green (ground cable)
- Other colours on request.

• VDE REG. Nr. approval printing on the sheath.

Note: this kind of cables may be supplied in spools, rolls or cut and processed according to costumer's request (for cable workings and terminals see "Section 8").

