

SINGLE-CONDUCTOR CABLES INSULATED IN FEP T150°C UR

KA---



Type of insulation: **FEP**
Working temperature: **T 150°C**
Type of conductor: **TIN-PLATED COPPER**
Working voltage: **300 V**
In conformity to the standards: **UL 758 AWM STYLE 1333 (VW-1)***
Approval marks: **cURus**

PROCESSED WIRE  FILE E221012

RESPOOLED WIRE  FILE E221012




- AWG table of the flexible conductor:

Code	AWG	Conductor strand	External diameter ±0,1 mm
KA19-	22 AWG	7 x 0,254	1,45
KA13-	20 AWG	19 x 0,203	1,7
KA18-	18 AWG	19 x 0,254	1,95

- Other AWG on request.

*Note: classification VW-1 for the versions AWG 22 and AWG 20.

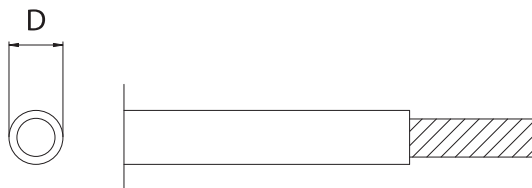

- AWG table of the solid conductor:

Code	AWG	Conductor strand	External diameter ±0,1 mm
KAR9-	22 AWG	1 x 0,64	1,4
KAR3-	20 AWG	1 x 0,813	1,55
KAR8-	18 AWG	1 x 1,03	1,75

- Other AWG on request.

*Note: classification VW-1 for the versions AWG 22 and AWG 20.

- Table of available colours:

N = black

R = red

- Other colours on request.

- cURus approval printing on the sheath.

Note: this kind of cables may be supplied in spools, rolls or cut and processed according to customer's request (for cable workings and terminals see "Section 8").