

MULTI-CONDUCTOR CABLES FOR LEDs APPLICATIONS INSULATED IN SILICONE + RUBBER PCP

NS---

2008



Type of insulation:

SILICONE + RUBBER PCP (polychloroprene)

Working temperature:

T 70°C (T 90°C ♦) for the sheath
T 180°C for the cores

Type of conductor:

RED OR TIN-PLATED COPPER


Working voltage:

60 V

In conformity to the requirements of the directive:

2014/35/EU

Approval marks:

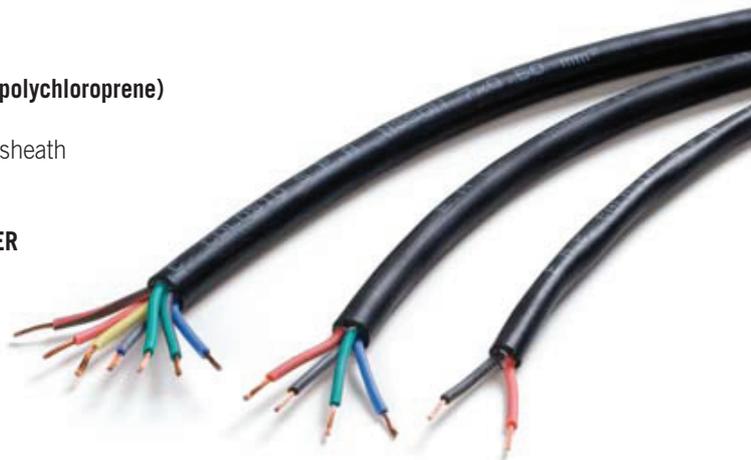

- RECOMMENDED FOR OUTDOOR USE

- Sections and multiple table of the cores:


Code	Sections mm ²	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
NS20N	2 x 0,50	16 x 0,20	r n	round	ø 5,9
NSQ0N	4 x 0,50	16 x 0,20	r n l v	round	ø 6,9
NSS0N	6 x 0,50	16 x 0,20	r r/n l l/n v v/n	round	ø 7,9

- Other sections on request.

* Colours table of the cores:

r = red n = black l = blue
v = green r/n = red+black l/n = blue+black
v/n = green+black

- ♦ T90°C for applications subjected to EN60598.

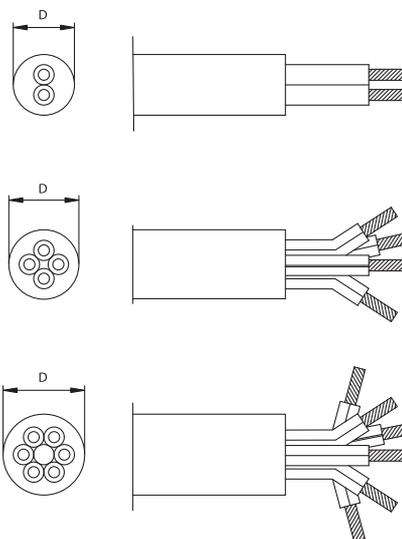

- Table of available colours:

N = black

- Other colours on request.

