

ADAPTERS WITH LAMPHOLDER FOR DISCHARGE LAMPS

M206/A91

2013

Adapter with lampholder:

E40 + PGZ12

Rated voltage:

500 V

Rated current:

4 A

Impulse voltage:

4 kV

Working temperature of the part with the E40 screw shell:

T 240°C with internal holder in LCP

Working temperature of the part lampholder PGZ12:

T 280°C


In conformity to the standards:

EN 60838 as far as applicable



Approval marks:

M206/A91H: Adapter with cap E40 with lampholder PGZ12, our code A91, with temperature of the part screw shell limited to T240°C.

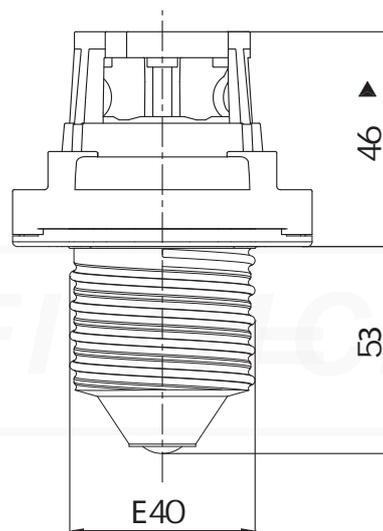

- For the technical characteristics of the lampholder PGZ12, our code A91, refer to the pages 271 and 270 of this catalogue.

- For the adapter part:

Screw shell in raw brass.

Internal housing in LCP T240°C.

For the lampholder part:

Steatite body.


External envelope in diecast aluminium.

Contacts in special silver-plated alloy.

Springs for the positioning of the lamp in stainless steel.

Leaf springs for the centering of the lamp in stainless steel.

- Weight: 160 g.

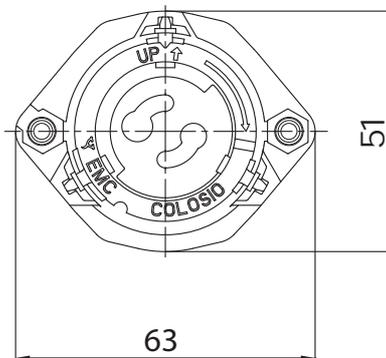

▲ Reference plane

