

PLUGS

M66-



Plug:

"SCHUKO ANTI SPLASH"
2 poles + ground

Rated voltage:

250 V

Rated current:

16 A C.A.

Insulation class:

I

Type of clamps for cables connection:

CRIMPED CLAMPS

Cable exit:

AXIAL

Protection degree:

IP44

In conformity to the standards:

CEI 23-50


Approval marks:

IMQ



- Table of the cables connected to the plug:

Insulation	Shape	Sections	Temperature	Type	cod./page
NEOPRENE + NEOPRENE	round	3 x 0,75 mm ²	T60°C	H05RN-F	NC37- (page 9048)
NEOPRENE + NEOPRENE	round	3 x 1,00 mm ²	T60°C	H05RN-F	NC31- (page 9048)
NEOPRENE + NEOPRENE	round	3 x 1,00 mm ²	T60°C	H07RN-F	NN31- (page 9049)
NEOPRENE + NEOPRENE	round	3 x 1,50 mm ²	T60°C	H07RN-F	NN35- (page 9049)

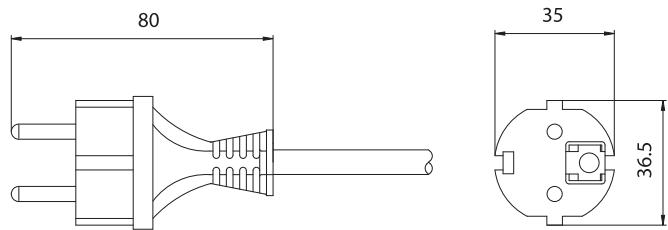

- Body in injected thermoplastic PVC.
Nickel-plated brass contacts.

- Table of the available colours:
N = black
- Other colours on request.

