

PLUGS - CONNECTORS

M67Y-



Plug - Connector:

C17
2 POLES

Rated voltage:

250 V

Rated current:

10 A

Insulation class:

II

Type of clamps for
cables connection:

CRIMPED CLAMPS

Cable exit:

AXIAL

Protection degree:

IP20


In conformity to the standards:

IEC 60320

In conformity to the
requirements of the directive:


2014/35/EU

Approval marks:

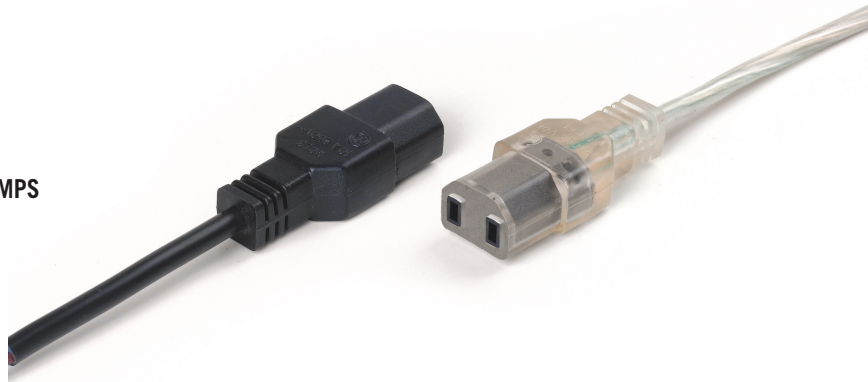

• Table of the cables connected to the plug:

Insulation	Shape	Sections	Temperature	Type	cod./page
PVC + PVC TRANSPARENT	round	2 x 0,75 mm ²	T70°C	FR0R	RT27T (page 9057)
PVC + PVC TRANSPARENT	round	2 x 0,75 mm ²	T70°C	FR0R	RN27T (page 9056)
FEP + PVC TRANSPARENT	round	2 x 0,75 mm ²	T90°C (T180°C cores)	FR5F	BT27T (page 9062)
PVC + PVC B - N	round	2 x 0,75 mm ²	T70°C	H03VV-F	RR27- (page 9053)
PVC + PVC B - N	round	2 x 0,75 mm ²	T90°C	H03V2V2-F	RH27- (page 9052)
PVC + PVC B - N	round	2 x 0,75 mm ²	T70°C	H05VV-F	RC27- (page 9055)
PVC + PVC B - N	round	2 x 1,00 mm ²	T70°C	H03VV-F	RR21- (page 9053)
PVC + PVC B - N	round	2 x 1,00 mm ²	T90°C	H03V2V2-F	RH21- (page 9052)

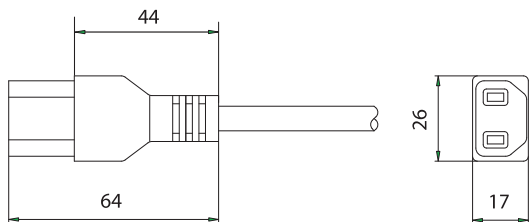

- Body in injected thermoplastic PVC.
Tin plated brass contacts.

• Table of the available colours:

T = transparent

B = white

N = black

- Other colours on request.

