

SOCKET FOR PLUGS-CONNECTORS

M79S- 2015

Socket:

Rated voltage:
Rated current:
Insulation class:
Type of clamps for
cables connection:
Cable exit:
Protection degree:

Approval marks:


**FEMALE SOCKET, CO-INJECTED
FOR PLUG-CONNECTOR M79C**

**48 V
1 A
III**

**CRIMPED
AXIAL
IP40**



M79S- moveable female socket, co-injected with cable,
for plug-connector M79C.

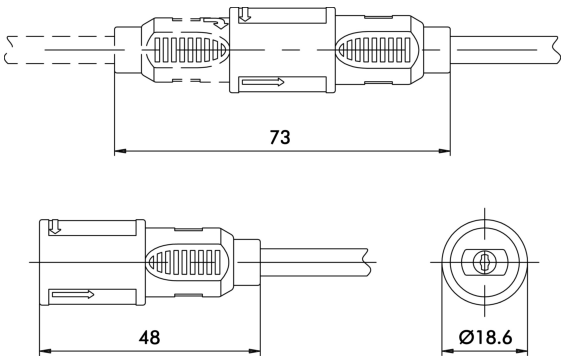

• Table of the **two poles** cables connected to the plug:

Insulation	Shape	Sections	Dimension mm	Code/Page
PVC + PVC	round	2x 0,35 mm ²	Ø 4,0	RL29- (page 9112)
PVC + PVC	round	2x 0,50 mm ²	Ø 4,8	RL20- (page 9112)
PVC + PVC	flat	2x 0,35 mm ²	4,0 x 2,5	RLP9- (page 9112)
PVC + PVC	flat	2x 0,50 mm ²	4,8 x 3,0	RLP0- (page 9112)
FEP + PVC	round	2x 0,35 mm ²	Ø 3,6	MTV9- / BTV9- (page 9114)
FEP + PVC TRANSPARENT	round	2x 0,35 mm ²	Ø 3,6	BT29Q / MT29Q (page 9113)
FEP + PVC	round	2x 0,50 mm ²	Ø 3,9	MTV0- / BTV0- (page 9114)
FEP + PVC TRANSPARENT	round	2x 0,50 mm ²	Ø 3,9	BT20Q / MT20Q (page 9113)
FEP + PVC	flat	2x 0,35 mm ²	3,6 x 2,4	MTD9- / BTD9- (page 9114)
FEP + PVC TRANSPARENT	flat	2x 0,35 mm ²	3,6 x 2,4	BTP9Q / MTP9Q (page 9113)
FEP + PVC	flat	2x 0,50 mm ²	4,2 x 2,7	MTD0- / BTD0- (page 9114)
FEP + PVC TRANSPARENT	flat	2x 0,50 mm ²	4,2 x 2,7	BTPOQ / MTPOQ (page 9113)

• In the transparent cables the polarization of the core(s) is carried out with line(s) of different colour(s)

• Table of the **coaxial** cables connected to the plug:

Insulation	Shape	Sections	Dimension mm	Code/Page
SILICONE + PVC	round	2 x 0,50 mm ²	Ø 3,5	GK20- (page 9108)
FEP + PVC	round	2 x 0,35 mm ²	Ø 2,7	BE29 (page 9106)
FEP + PVC	round	2 x 0,50 mm ²	Ø 3,2	BE20 (page 9106)
FEP + PVC	round	2 x 0,75 mm ²	Ø 2,8	BE27- (page 9106)
FEP + PVC EXTRA-FLEXIBLE	round	2 x 0,50 mm ²	Ø 2,7	BK20- (page 9107)

• Body in co-injected thermoplastic PVC.

• Table of the available colours:

N = black
B = white
E = grey
T = transparent/clear

