PLUGS

Cable exit:

Plug: "AUSTRALIAN"

2 poles

AXIAL

Rated voltage: 250 V Rated current: 7,5 A

Type of clamps for cables connection:


In conformity to the standards: AS - NZS 3112

Approval marks: NSW



• Table of the cables connected to the plug:

Insulation	Shape	Sections mm ²	Temperature	Dimension ±0,2	Туре
PVC + PVC	round	2 x 0,75 mm ²	T70°C	ø 5,4	H03VV-F
PVC + PVC	flat	2 x 0,75 mm ²	T70°C	5,6 x 3,5	H03VVH2-F
PVC + PVC	round	2 x 0,75 mm ²	T70°C	ø 6,2	H05VV-F

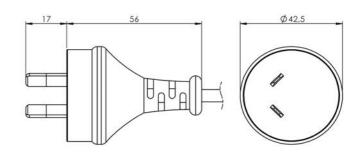

- Body in injected thermoplastic PVC. Brass contacts.
- Table of the available colours:

 $\mathbf{B} = \text{white}$

N = black





