

# SINGLE-CONDUCTOR CABLES INSULATED IN PFA T260°C

**P0---**

**CE**


Type of insulation:	<b>PFA</b>
Working temperature:	<b>T 260°C</b>
Type of conductor:	<b>NICKEL-PLATED COPPER</b>
Working voltage:	<b>470/750 V</b>
Cable nomenclature:	<b>FR5P</b>
In conformity to the standards:	<b>CEI 20-51</b>
In conformity to the requirements of the directives:	<b>2014/35/EU</b>
Approval marks:	<b>IEMMEQU</b>



- Sections table of the flexible conductor:

Code	Sections mm <sup>2</sup>	Conductor strand	External diameter ±0,2 mm
<b>P010-</b>	0,50 mm <sup>2</sup>	19 x 0,18	1,4
<b>P017-</b>	0,75 mm <sup>2</sup>	19 x 0,23	1,6
<b>P011-</b>	1,00 mm <sup>2</sup>	19 x 0,26	1,8

- Other sections on request.

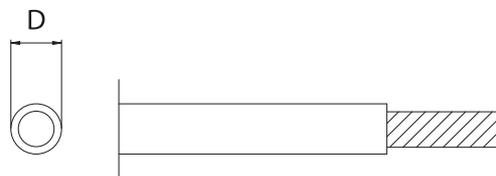

- Table of available colours:
- T** = transparent
- B** = white
- L** = blue
- M** = brown
- N** = black
- Other colours on request.

- IEMMEQU approval printing on the sheath.

*Note: this kind of cables may be supplied in spools, rolls or cut and processed according to customer's request (for cable workings and terminals see "Section 8").*