

SINGLE-CONDUCTOR CABLES INSULATED IN PFA + PFA, DOUBLE INSULATION, T260°C

PD---

1989

CE

Type of insulation: PFA + PFA

Working temperature: T 260°C

Type of conductor: NICKEL-PLATED COPPER

Working voltage: 450/750 V

In conformity to the standards with reference to the inner core: CEI 20-51

In conformity to the requirements of the directives: 2014/35/EU

Approval marks, of the inner core, in single insulation: IEMMEQU




Double insulated cable to be applied in class II fixtures.

• Sections table of the flexible conductor:

Code	Sections mm ²	Conductor strand	External diameter ±0,2 mm
PD10-	0,50 mm ²	19 x 0,18	1,9
PD17-	0,75 mm ²	19 x 0,23	2,1
PD11-	1,00 mm ²	19 x 0,26	2,2

• Other sections on request.

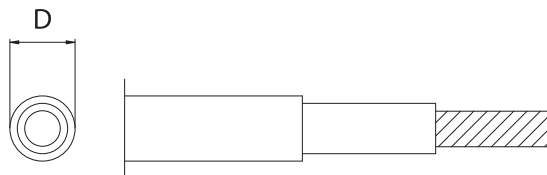

• Table of available colours:

- T = transparent
- B = white
- L = blue
- M = brown
- N = black
- Other colours on request.

• IEMMEQU approval printing on the sheath of the inner core in single insulation.

Note: this kind of cables may be supplied in spools, rolls or cut and processed according to customer's request (for cable workings and terminals see "Section 8").

