

SINGLE-CONDUCTOR CABLES INSULATED IN SILICONE + SILICONE, DOUBLE INSULATION, T180°C

SD---

CE

Type of insulation:	SILICONE + SILICONE
Working temperature:	T 180°C
Type of conductor:	TIN-PLATED COPPER
Working voltage:	450/750 V
Impulse voltage:	5 kV
In conformity to the requirements of the directives:	2014/35/EU
Approval marks:	C.S.v. IMQ




Double insulated cable to be applied in class II fixtures.

- Sections table of the flexible conductor:

Code	Sections mm ²	Conductor strand	External diameter ±0,2 mm
SD17-	0,75 mm ²	24 x 0,20	3,7
SD11-	1,00 mm ²	32 x 0,20	3,8
SD15-	1,50 mm ²	30 x 0,25	5,0

- Other sections on request.

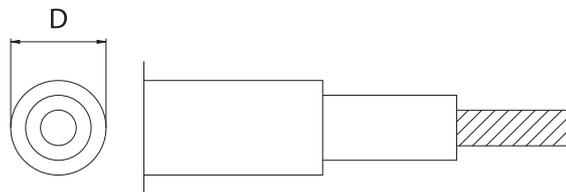

- Sections table of the solid conductor:

Code	Sections mm ²	Conductor strand	External diameter ±0,2 mm
SDR7-	10/10 (0,75 mm ²)	1 x 0,98	3,6
SDR1-	12/10 (1,00 mm ²)	1 x 1,13	3,7
SDR5-	14/10 (1,50 mm ²)	1 x 1,38	4,8

- Other sections on request.

- Table of available colours:

B = white
L = blue
M = brown
N = black
 - Other colours on request.

- C.S.v. IMQ approval printing on the sheath.

Note: this kind of cables may be supplied in spools, rolls or cut and processed according to customer's request (for cable workings and terminals see "Section 8").

