

# SINGLE-CONDUCTOR CABLES INSULATED IN OVERSIZED SILICONE 1,8 / 3 kV T180°C

**SM---**

**CE**


**Type of insulation:** "OVERSIZED" SILICONE  
**Working temperature:** T 180°C  
**Type of conductor:** TIN-PLATED COPPER  
**Working voltage:** 1,8/3 kV  
**Impulse voltage:** 10 kV  
**In conformity to the standards:** DIN VDE 0250  
**In conformity to the requirements of the directives:** 2014/35/EU  
**Approval marks:** VDE REG. Nr.



- Sections table of the flexible conductor:

Code	Sections mm <sup>2</sup>	Conductor strand	External diameter ±0,2 mm
SM11-	1,00 mm <sup>2</sup>	32 x 0,20	3,9

- Other sections on request.

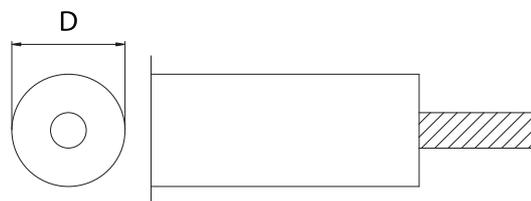

- Table of available colours:  
**B** = white  
 - Other colours on request.

- VDE REG. Nr. approval printing on the sheath.

*Note: this kind of cables may be supplied in spools, rolls or cut and processed according to customer's request (for cable workings and terminals see "Section 8").*

