

MULTI-CONDUCTOR CABLES INSULATED IN PVC + PVC T105°C cULus



Type of insulation: PVC + PVC SVT
Working temperature: T 105°C
Type of conductor: RED COPPER
Working voltage: 300 V
In conformity to the standards: UL 62/1581 CSA 22.2
Approval marks: cULus Listed



PROCESSED WIRE FILE E221012

RESPOOLED WIRE FILE E221012


- AWG and multiple table of the cores:

Code	AWG	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
WV28-	2 x 18	48 x 0,15	n b	round	∅ 6,4
WV38-	3 x 18	48 x 0,15	n b v	round	∅ 6,6

- Other AWG on request.

* Colours table of the cores:

n = black b = white v = green

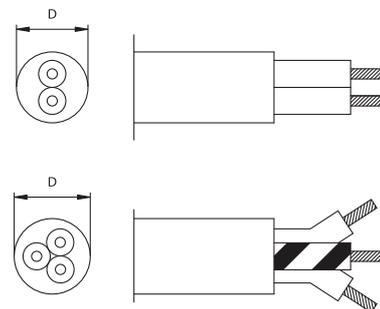

- Table of available colours:
N = black
B = white
E = grey
 - Other colours on request.

- cULus approval printing engraved, without ink, on the sheath.

