

MULTI-CONDUCTOR CABLES IN PVC + PVC TRANSPARENT/CLEAR cULus

WV--T



Type of insulation: PVC + PVC SVT

Working temperature: T 105°C

Type of conductor: RED COPPER

Working voltage: 300 V

In conformity to the standards: UL 62/1581 CSA 22.2 (FT2)

Approval marks: cULus Listed



PROCESSED WIRE **FILE E221012**

RESPOOLED WIRE **FILE E221012**

- AWG and multiple table of the cores:

Code	AWG	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
WV28T	2 x 18	48 x 0,15	n b	round	ø 6,4
WV38T	3 x 18	48 x 0,15	n b v	round	ø 6,6


- Other AWG on request.

* Colours table of the cores:

n = black

b = white

v = green

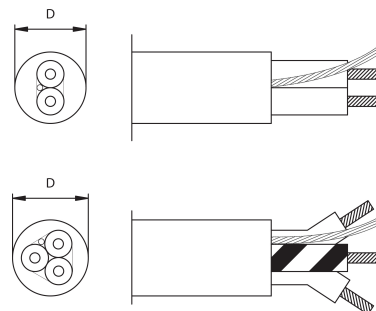

- cULus approval printing engraved, without ink, on the sheath.

- Table of available colours:
T = transparent / clear
(with Aluminum/Silver tape between cores and sheath)