

MULTI-CONDUCTOR CABLES IN PVC + PVC + COLOURED FABRIC SVT-B

WV--X--




Type: PVC + PVC + COLOURED FABRIC SVT-B
Rated temperature: T 105°C
Type of conductor: RED COPPER
Rated voltage: 300 V
In conformity to the standards: UL 62 CSA22.2 No. 49
Approval marks: cULus Listed



PROCESSED WIRE FILE E221012

RESPOOLED WIRE FILE E221012

WV--X--: PVC INSULATED AND JACKETED FLEXIBLE CORD WITH COLOURED FABRIC BRAID COVERING
(Available in a wide variety of colours)

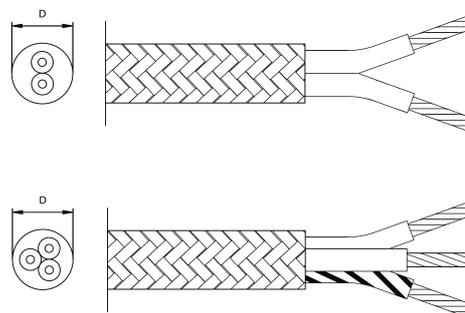

• Sections and multiple table of the cores:

Code	AWG	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
WV28X--	2 x 18	48 x 0,15	n b	round	ø 6,8
WV38X--	3 x 18	48 x 0,15	n b v	round	ø 7,1

• Other AWG on request.

* Colours table of the cores:

n= black b= white v= green

• cULus cable marking printed with ink on the sheath or present on a tape placed longitudinally under the braid.

