

CAVI MULTIPOLARI IN PVC + PVC CON ARMATURA IN PET

RR--Y--

CE

Type of insulation: **PVC + PVC + ARMATURA IN PET COLORATO**

Working temperature: **T 70°C (T70°C l'armatura in PET)**

Type of conductor: **RAME ROSSO**
 Working voltage: **300/300 V**
 Cable nomenclature: **H03VV-F (*)**
 In conformity to the standards: **EN50525-2-11:2011 (*)**
 In conformity to the requirements of the directives: **2014/35/EU**

Approval marks: **IEMMEQU - <HAR> (*)**

(*) For the inner cable




Cavi con armatura in PET colorato

- Tabella delle sezioni e dei multipli dei conduttori:

Codice	Sezioni mm ²	Formazione conduttore	Colori anime*	Forma	Misura ±0,2 mm
RR27Y--	2 x 0,75	24 x 0,193	l m	tonda	ø 6,3
RR37Y--	3 x 0,75	24 x 0,193	l m g	tonda	ø 6,8
RR47Y--	4 x 0,75	24 x 0,193	l m n g	tonda	ø 7,4

- Altre sezioni a richiesta.

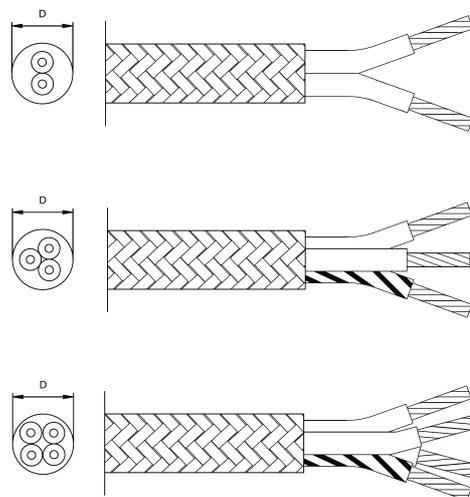

- * Tabella dei colori dei conduttori:

l = blu m = marrone g = giallo/verde
 n = nero

- Tabella colori disponibili:

N = nero
B = bianco
E = grigio
R = rosso
 - Altri colori a richiesta

- Stampigliatura del marchio IEMMEQU - <HAR> ad incisione, senza inchiostro, sulla guaina.

